



サイタ機械室レス ロープ式人荷用エレベーター (750~2000kg)

標準寸法及びピット反力(RC構造) 2枚戸片開き(2S-2P)つり合いおもり横落ちの場合

昇降路断面図

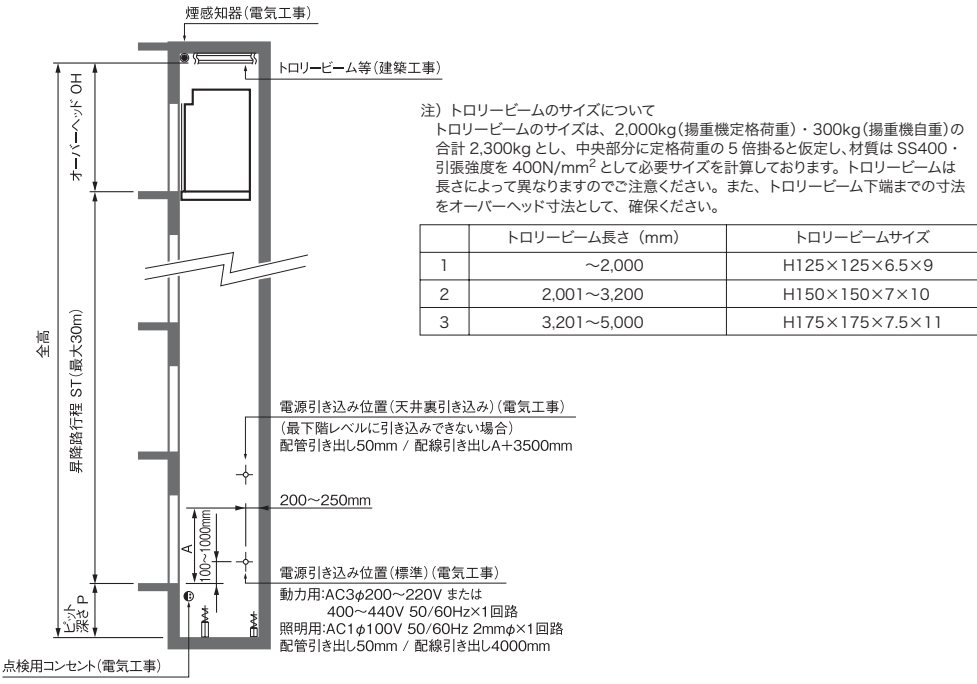

昇降路平面図

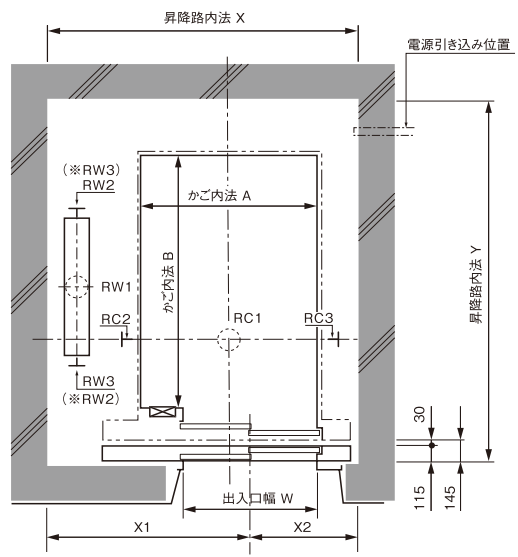

寸法表

積載質量 (kg)	定員 (人)	定格速度 (m/min)	電動機容量 (kW)	かご内法 (mm)		出入口幅 (mm) W	昇降路内法 (mm)				オーバーヘッド OH (mm)	ピット深さ P (mm)
				A	B		X	Y	X1	X2	ST≤30m	最小
750	11	45	3.5	1200	1550	900	2100	2120	1375	725	3250	1250
		60	4.6								3300	
900	13	45	4.2	1400	1550	1000	2300	2120	1525	775	3250	1250
		60	5.6								3300	
1000	15	45	4.6	1400	1700	1000	2300	2270	1525	775	3250	1250
		60	6.2								3300	
1150	17	45	5.3	1500	1800	1100	2550	2370	1715	835	3250	1250
		60	7.1								3300	
1300	20	45	6.3	1300	2300	1100	2350	2870	1515	835	3250	1250
		60	8.3								3300	
		45	6.3	1500	2000	1200	2550	2570	1665	885	3250	
		60	8.3								3300	
1600	24	45	7.4	1500	2300	1300	2550	2870	1615	935	3250	1250
		60	9.9								3300	
1750	26	45	8.3	1500	2500	1200	2600	3070	1700	900	3250	1250
		60	12.0								3300	
2000	30	45	9.2	1800	2300	1500	2900	2870	1850	1050	3250	1250
		60	13.0								3300	

反力

積載質量 (kg)	定員 (人)	定格速度 (m/min)	電動機容量 (kW)	かご内法 (mm)		反力 (kN)					
				A	B	かご側			つり合いおもり側		
						RC1	RC2	RC3	RW1	RW2	RW3
750	11	45	3.5	1200	1550	67.5	26.0	25.5	53.5	39.0	11.0
		60	4.6			83.5			66.5		
900	13	45	4.2	1400	1550	74.5	27.5	27.0	58.0	41.0	11.0
		60	5.6			92.5			71.5		
1000	15	45	4.6	1400	1700	79.5	29.0	28.5	61.0	42.5	11.5
		60	6.2			98.5			75.5		
1150	17	45	5.3	1500	1800	91.5	44.5	32.5	70.0	39.5	16.5
		60	7.1			113.0			86.5		
1300	20	45	6.3	1300	2300	100.0	46.5	34.5	76.0	41.5	18.0
		60	8.3			124.0			94.5		
		45	6.3	1500	2000	100.0	46.5	34.5	76.0	41.5	18.0
		60	8.3			124.0			94.5		
1600	24	45	7.4	1500	2300	118.5	51.5	39.5	88.5	45.5	20.5
		60	9.9			147.0			110.0		
1750	26	45	8.3	1500	2500	68.0×2	58.0	44.5	103.5	51.5	24.5
		60	12.0			84.5×2			128.0		
2000	30	45	9.2	1800	2300	75.5×2	62.0	48.5	114.0	55.0	26.5
		60	13.0			93.5×2			141.0		